

KUTGDM Merchandiser

Merchandiser Refrigerator

MODELS

□ KUTGDM-1



STANDARD FEATURES

- Stylish black laminated vinyl.
- Sturdy stainless-steel interior floor with coved corner floors to meet NSF standards.
- "Low E" double pane thermal insulated glass door.
- Easy grip handles and self closing door with 90° stay open door feature.
- LED lighting to enhance product display.
- One piece magnetic gasket is removable without tools.
- "Ecomate" (GWP) (ODP) insulation, 2-3/8" thick.
- In step door design and full-length handle.
- One-piece magnetic door gasket, removable without tools.
- Zamak hinges for a durable long-lasting door.
- · Field reversible door.
- R-290 Hydrocarbon, to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Hermetic compressor, self-contained refrigeration with epoxy coated evaporator.
- Automatic evaporator: Paper fins not utilized in the evaporation process.
- · Electronic controller with digital display.
- · Standard with 3" castors.
- Meets the NSF-7 standard for food safety.

ELECTRIC

- 115V / 60Hz / 1Ph
- NEMA 5-15P
- Cord Length: 10 ft.

TEMPERATURE

 32 °F to 38 °F based on an external environment of 90 °F and 65% RH.









Revision Date: January 27, 2023


Kutano assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

KUTGDM Merchandiser

KUTANO

KUTGDM Merchandiser

Merchandiser Refrigerator

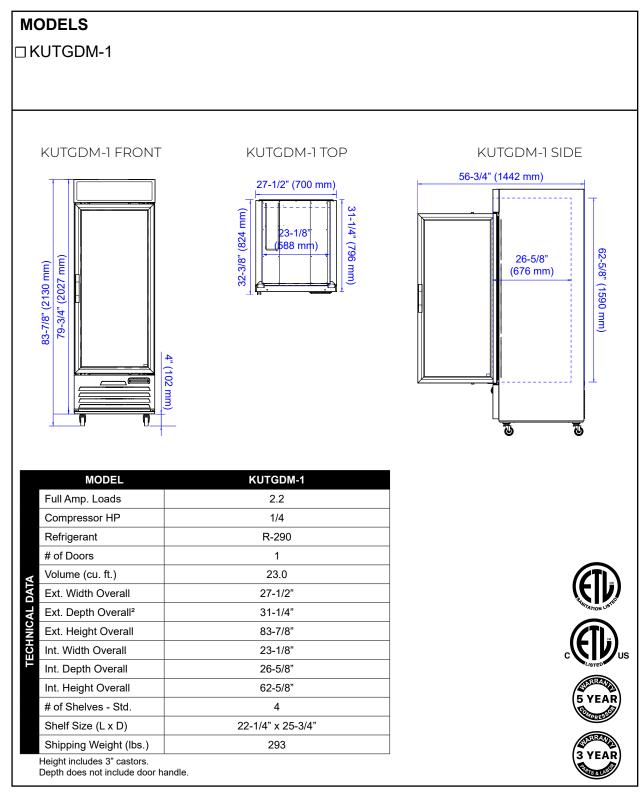

Revision Date: January 27, 2023

Kutano assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.