

Manual Griddles

COUNTERTOP GAS MANUAL GRIDDLES 5/8" THICK
 COUNTERTOP GAS MANUAL GRIDDLES 3/4" THICK



All Stainless-Steel construction, interior and exterior front, and sides. To include **Stainless-Steel burner support and pilot tubing**. The all Stainless-Steel construction is designed to last and perform in the most demanding kitchens.

For the safety and convenience of operators, our Asber countertop ranges come standard with a 5" Stainless Steel bull nose landing ledge, Zamac heat resistant knobs for added durability, and reinforced valve system for extra safety.

All units are ETL certified under ANSI Z83.11-CSA 1.8 standard.

GRIDDLES

Cold-rolled steel plate 5/8" thick welded to the perimeter top of the truss.

"H" units have Cold-rolled steel plate 3/4" thick welded to the perimeter top of the truss.

U-Type burners placed every 12" for even heat distribution on griddle surface.

14 gauge stainless steel 4" back and side splashes.

Independent pilot per burner.

4" grease trough channel.



AEMG-36




AEMG-48-H

MODEL	BURNERS	BTU x BURNER	TOTAL BTU	DIMENSIONS (in)			SHIPPING	
				Width	Depth	Height	Lbs.	ft ³
COUNTERTOP GAS MANUAL GRIDDLES 5/8" THICK								
AEMG-12	1	30.000	30.000	12	32-3/8	13-1/4	119	3.5
AEMG-24	2	30.000	60.000	24	32-3/8	13-1/4	161	7.1
AEMG-36	3	30.000	90.000	36	32-3/8	13-1/4	218	10.6
COUNTERTOP GAS MANUAL GRIDDLES 3/4" THICK								
AEMG-24-H	2	30.000	60.000	24	32-3/8	13-1/4	185	7.1
AEMG-36-H	3	30.000	90.000	36	32-3/8	13-1/4	238	10.6
AEMG-48-H	4	30.000	120.000	48	32-3/8	13-1/4	348	14.1
COUNTERTOP GAS MANUAL GRIDDLES 1" THICK								
AEMG-60-H	5	30.000	150.000	60	32-3/8	13-1/4	441	17.7
AEMG-72-H	6	30.000	180.000	72	32-3/8	13-1/4	661	21.2

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.

Manual Griddles

COUNTERTOP GAS MANUAL GRIDDLES 5/8" THICK
 COUNTERTOP GAS MANUAL GRIDDLES 3/4" THICK

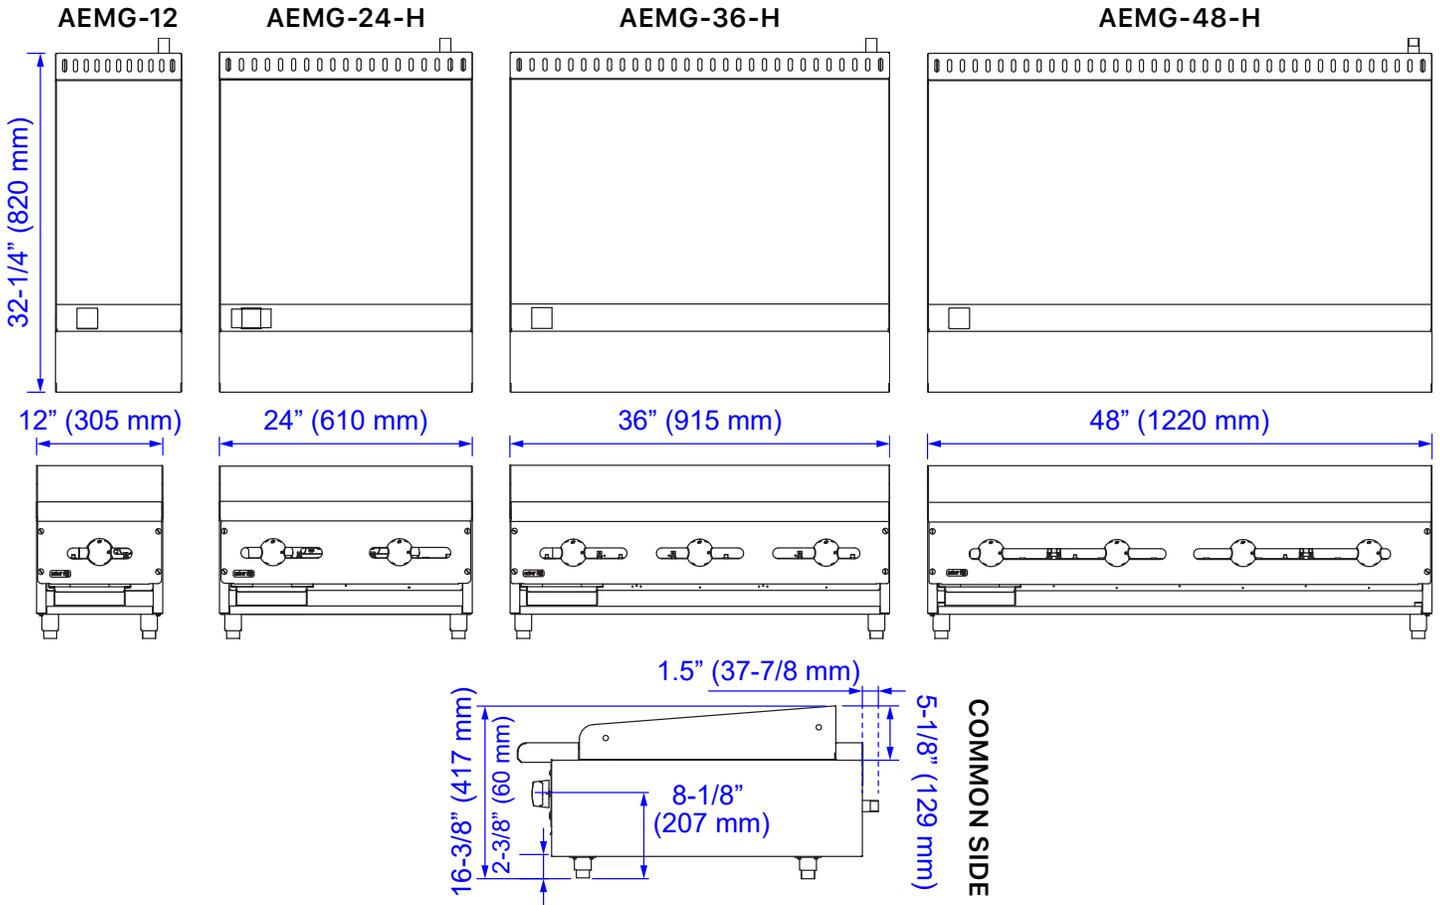

MODEL	AEMG-12	AEMG-24-H	AEMG-36-H	AEMG-48-H
GAS CONNECTION				
Gas Type	Natural Gas (NG) / Propane Gas (LPG)			
Gas Pressure	5.0" W.C. / 10.0" W.C.			
Gas Line	3/4 or more			
Pressure Regulator	Included			
SHIPPING DIMENSIONS (IN)				
Width	15	27	39	51
Depth	36			
Height	20-1/8			



INSTALLATION REQUIREMENTS

- 1. GAS CONNECTION:** gas line must be 3/4" or larger, same if flexible connectors are used.
- 2. VENTILATION:** an adequate ventilation system is required for commercial cooking equipment. Request more info @ National-Fire Protection Association, www. NFPA.org.
- 3. CLEARANCE:** 3" on the sides and the back for combustible; 0" for non-combustible buildings.
- 4. DISCLAIMER:** Asber assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. | SPECIFICATIONS VALID ONLY FOR CONTINENTAL USA & CANADA.