



BEVERAGE-AIR®

| | |
|-----------------|------------|
| Project: _____ | AIA# _____ |
| Item: _____ | |
| Location: _____ | SIS# _____ |
| Approved: _____ | |

SIDE MOUNT UNDERCOUNTER REFRIGERATOR

UCR93AHC Solid Door Refrigerator
Hydrocarbon Series

MODEL:
UCR93AHC

UCR93AHC UNDERCOUNTER REFRIGERATOR



7 Year Parts/Labor Warranty
7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Six (6) epoxy-coated steel wire shelves
- Field-reversible doors

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Additional shelves
- Shelf clips
- Right or left hinged door
- Door locks
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F




Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR®

| MODEL | UCR93AHC |
|------------------------------------|---------------------|
| EXTERNAL DIMENSIONAL DATA | |
| Width Overall | 93 1/8" |
| Depth Overall with Handle & Bumper | 34 3/4" |
| Height Overall with 6" Casters | 34 1/2" |
| Number of Doors | 3 |
| Depth with Door Open 90° | 57 1/8" |
| Door Opening | 21 5/8" x 23 5/8" |
| INTERNAL DIMENSIONAL DATA | |
| NET Capacity (cubic ft.) | 29.7 |
| Internal Width Overall (in) | 89" |
| Internal Depth Overall (in) | 26" |
| Internal Height Overall (in) | 25" |
| Number of Shelves | 6 |
| ELECTRICAL DATA | |
| Full Load Amperes | 5.0 |
| Voltage | 115/60/1 |
| Nema Plug (8' cord) | 5-15P |
| REFRIGERATION DATA | |
| Horsepower | 1/3 |
| Capacity (BTU/Hr) | 2629 |
| Heat Rejection (BTU/Hr) | 3943.5 |
| Charge (lbs/grams/ounces) | 0.3086 / 140 / 4.94 |
| SHIPPING DATA | |
| Gross Weight - Crated | 468 lbs |
| Height - Crated | 39" |
| Width - Crated | 96" |
| Depth - Crated | 35" |


**NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).


Undercounter Refrigerator - Side Mount Model: UCR93AHC

Model Views


Required Clearance: 3" Bottom & 2" Rear

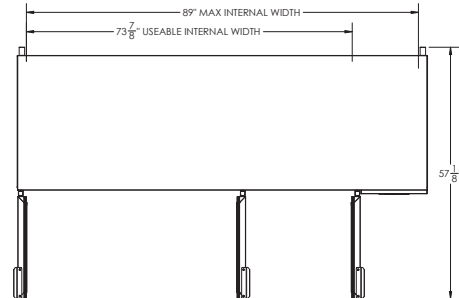

PLAN VIEW

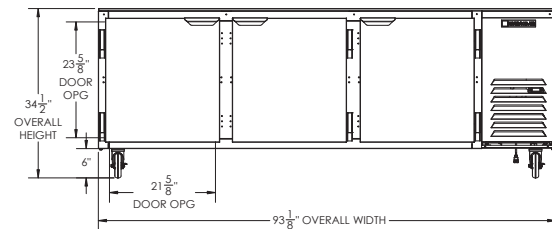

ELEVATION VIEW



SIDE VIEW

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Unit pre-wired at
factory and include 8'
long cord and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

