

D83R-GS3

Bottom Mounted / 3 Glass Door



1 TECHNICAL SPECIFICATIONS

Voltage/Frequency Refrigerant R290
Type of Defrost Automatic Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2 + Nema Config. NEMA5-15P



PRODUCT FEATURES

- Equipped with Locking Doors
- The compressor is mounted in the bottom for better heat evaporation.
- B.B. Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- (Y) Hinged glass doors, tempered glass, UV blocking.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com


www.DukersUSA.com


DETAILS & SPECIFICATIONS

D83R-GS3

Side View

Front View

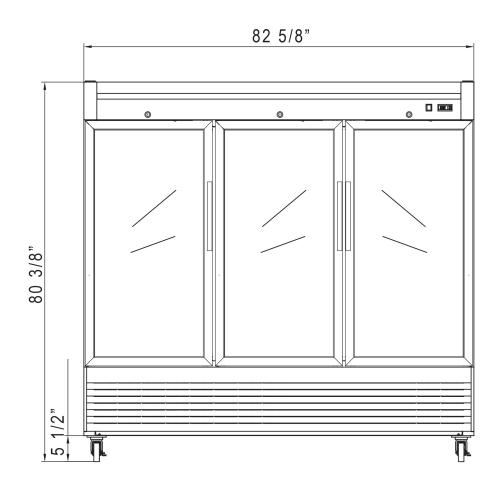

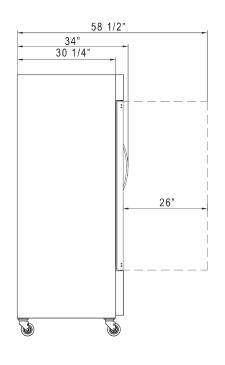

MODEL D83R-GS3

Rated Voltage 115V 60Hz Rated Frequency 730W **Total Input Power Total Current** 8.6A 65.16 cu ft **Total Capacity Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG** 150 PSIG **Design Pressure Low Side Insulation Blowing Gas** C-Pentane Refrigerant R290/5.22 oz

MODEL	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET	# OF	40HQ
	WXDXH (INCHES)	WXDXH (INCHES)	WEIGHT	SHELVES	CONTAINER CERT.
D83R-GS3	82 5/8 x 34 x 80 3/8	84 1/4 x 36 5/8 x 82 3/8	822 lbs	12	13















Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

