

**Quality Commercial Refrigeration** 

| Item # \_\_\_\_\_\_ | Qty # \_\_\_\_\_ | Model # \_\_\_\_\_ | Project # \_\_\_\_\_



# FRYER FIVE TUBE BURNER DCF5-LPG / DCF5-NG





FRYER	DIMENSION			
MODEL				
DCF5-NG	21 in	32 7/8 in	45 in	
DCF5-LPG	21 in	32 7/8 in	45 in	









## PRODUCT DESCRIPTION

- Five highly efficient red tube, cast iron burners create a large heat-transfer area for reliable, even heat distribution. Our durable temperature probe senses temperature changes and activates a quick burner response.
- The temperature for the DCF5-LPG/DCF5-NG from 200°F (93°C) to 400°F (204°C). Includes Millivolt safety control system.
- Every inch of the frypot and cold zone can be cleaned and wiped down by hand.
- The large cold zone and forward sloping bottom help collect and remove sediment from the frypot to safeguard oil quality and support routine frypot cleaning.



# **ROBUST DESIGN**

All measures are presented in Inches



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey


**( 1-800-931-8628** 


(a) info@dukersusa.com


www.DukersUSA.com

# **DETAILS &**SPECIFICATIONS

### FRYER DCF5-LPG / DCF5-NG

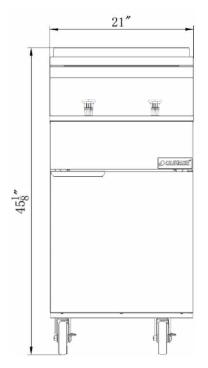





**Front View** 

**Top View** 

Side View

### DCF5-LPG

**GAS SOURCE LPG WORK AREA** 19.49x13.98in **BURNER** 5 count 30000 BTU/H SINGLE BURNER **COMBINED** 150000 BTU/H **OIL TANK CAPACITY** 70 lbs **GAS PRESSURE** 10 "WC NOZZEL 52# **CONTAINER FITMENT** 92

#### DCF5-NG

NG **GAS SOURCE WORK AREA** 19.49x13.98in **BURNER** 5 count 30000 BTU/H SINGLE BURNER 150000 BTU/H **COMBINED OIL TANK CAPACITY** 70 lbs 4 "WC **GAS PRESSURE NOZZEL** 39# **CONTAINER FITMENT** 92

Model -	Packaging Dimensions (inches)		Net Weight	Ship Weight	
	W	D	Н	(lbs)	(lbs)
DCF5-LPG	23 3/8"	35 3/8"	37 5/8"	220.46	246.92
DCF5-NG	23 3/8"	35 3/8"	37 5/8"	220.46	246.92









Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com

www.DukersUSA.com