

# VUR27A/48A

Undercounter 27"/48" Refrigerator

**W x D x H**  
27" x 30" x 33.75"  
(including 4" casters)



**W x D x H**  
47.75" x 30" x 33.75"  
(including 4" casters)



## Dimensions / Capacity

	<b>One Section VUR27A</b>	<b>Two Section VUR48A</b>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.33 ft <sup>3</sup>	12.09 ft <sup>3</sup>
<b>Overall Width x Depth (including 1" bumper)</b>	27" x 31.25"	47.75" x 31.25"
<b>Height (including 4" casters)</b>	33.75"	33.75"
<b>Door Opening (W x H)</b>	22.6" x 22.75"	19.5" x 22.75"
<b>Depth with Door Open at 90°</b>	54.5"	51.5"
<b>Adjustable Shelves</b>	1	2
<b>Shelf Dimensions (W x D)</b>	22" x 16"	21.25" x 16"
<b>Crated Shipping Weight</b>	200 lbs.	290 lbs.
<b>Crated Length x Depth x Height</b>	33" x 29" x 37"	52" x 33" x 37"

## Electrical / Refrigeration

	<b>One Section VUR27A</b>	<b>Two Section VUR48A</b>
<b>Voltage</b>	115/60/1	115/60/1
<b>HACR Breaker</b>	15.0 Amps	15.0 Amps
<b>Electrical Connection (NEMA)</b>	5-15P	5-15P
<b>Voltage Range</b>	115-127	115-127
<b>Ambient Temp. Range</b>	45° to 100°F	45° to 100°F
<b>Control Setpoint Range</b>	33° to 39°F	33° to 39°F
<b>Amperage</b>	1.5	1.8
<b>Energy Consumption (kWh/day) @ASHRAE</b>	0.95	1.21
<b>Appox. Nominal Compre. BTU/HR (HP)</b>	1289(1/6)	1709(1/6)
<b>Refrigerant / Charge Amount (oz.)</b>	R290 / (1.9oz)	R290 / (2.5oz)

## Options

6" Casters (set of 4) (HS-5036)  
 2.25" Casters (set of 4) (HS-5037)

Single overshel for 27" (HS-5172)  
 Single overshel for 48" (HS-5173)  
 Double overshel for 27" (HS-5163)  
 Double overshel for 48" (HS-5164)

**VALIANCE.**

by HOSHIZAKI

VUR27A/48A  
09/15/25  
Item #13740

Item #: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 AIA#: \_\_\_\_\_

## FEATURES

- Engineered to maintain NSF-7 temperatures of 100° ambient
- Stainless steel exterior front, sides, and top
- Front breathing air flow design
- Environmentally friendly R290 hydrocarbon refrigerant
- Spring assisted self-closing doors with stay open feature
- Stainless steel exterior doors, sides, and top
- Single section doors are field reversible (no kit needed)
- Stainless steel interior floor with aluminum sides, rear, and top
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 1 per section. 105 lbs. capacity
- Aluminum shelf supports are adjustable in 1/2" increments
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty:  
VUR27A: 88  
VUR48A: 46

## Warranty

3 Year - Parts on entire machine. 4 Year - Labor on entire machine. 5 Year - Parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

# VUR27A/48A


Undercounter 27"/48" Refrigerator

VALIANCE®


by  HOSHIZAKI

VUR27A/48A  
09/15/25  
Item #13740

## FRONT VIEW

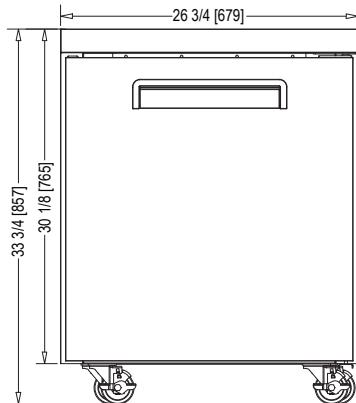


VUR27A

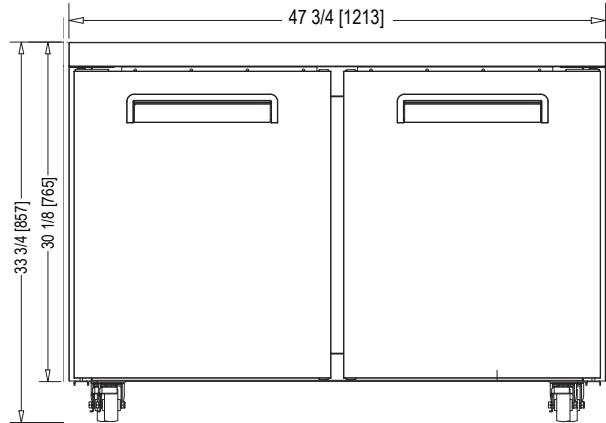


VUR48A

## SIDE VIEW

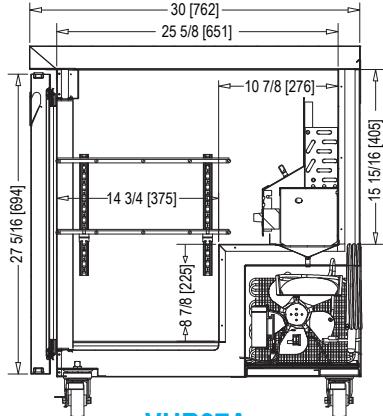


VUR27A

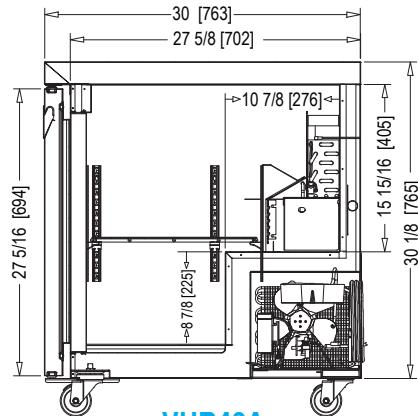


VUR48A

## PLAN VIEW

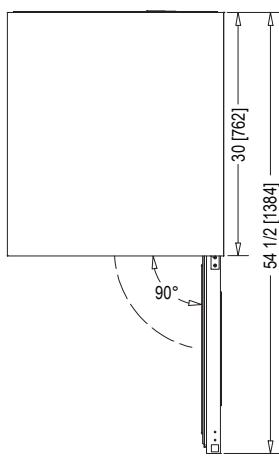


VUR48A

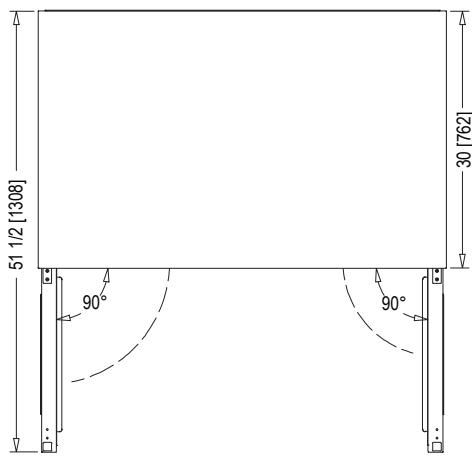


VUR48A

## REAR VIEW

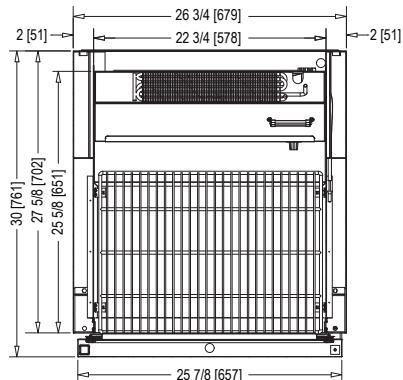

VUR27A

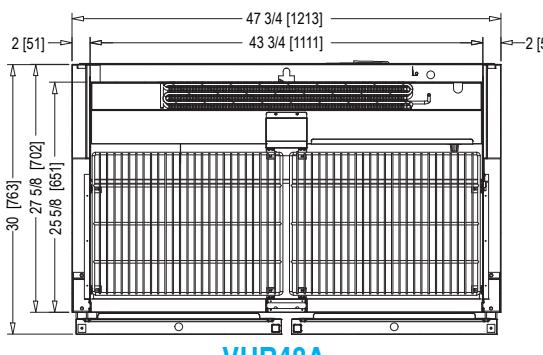

VUR48A