



## **Chest Freezer Solid Top Chest Freezer 52 " Long**



738230 (KCCF140WH)

Solid Top Chest Freezer 52  
" Long

### **Short Form Specification**

#### **Item No.**

Solid top chest freezer, 52 inches long, with foamed lid and spring hinge closing mechanism to ensure gentle lid closure. Lid lock and key included. Internal and external structure in white painted steel for durable and sleek look. (1) coated wire storage basket, vertical basket divider, NSF thermometer included as standard. Defrost water drain with plug for easy cleaning.

Equipped with NEMA 5-15P plug.

R600a gas in the refrigeration circuit  
ETL Safety and Sanitation certifications

**ITEM #** \_\_\_\_\_  
**MODEL #** \_\_\_\_\_  
**NAME #** \_\_\_\_\_  
**SIS #** \_\_\_\_\_  
**AIA #** \_\_\_\_\_

### **Main Features**

- Removable gasket for easy cleaning operations.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- NSF®-Certified Temperature Gauge - Durable and reliable for safety in food storage
- Coated wire basket with vertical divider for convenient and organized storage (1 basket included)
- Mechanical temperature control panel ensures reliable operation and easy adjustment
- Internal temperature display providing clear visibility of operating conditions
- Removable rubber bumper guards for airflow spacing and shock absorption
- Cabinet capable of accepting 14 standard sized 3-gallon ice cream tubs

### **Construction**

- Painted white steel exterior, for durable and sleek finish
- Internal drain for easy clean out.
- Durable white painted steel interior, ensuring easy cleaning and long-lasting performance
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.
- Even cooling throughout the unit with advanced cold wall technology
- Locking lids and key protect the contents of the unit.
- Spring-assisted hinge mechanism ensures smooth lid opening and controlled closing
- Foamed lid construction provides superior insulation and enhanced structural strength
- Static condenser design enhances efficiency while minimizing moving parts and service requirements

### **Sustainability**

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 70 mm insulation for energy saving

### **Optional Accessories**

- Basket for Solid Top Chest Freezer PNC 882000 □ 22.63x8.15x7.52 in. (575x207x191 mm)


#### **APPROVAL:**

Part of




Electrolux  
Professional  
Group

**Kelvinator Commercial**  
[www.kelvinatorcommercial.com](http://www.kelvinatorcommercial.com)

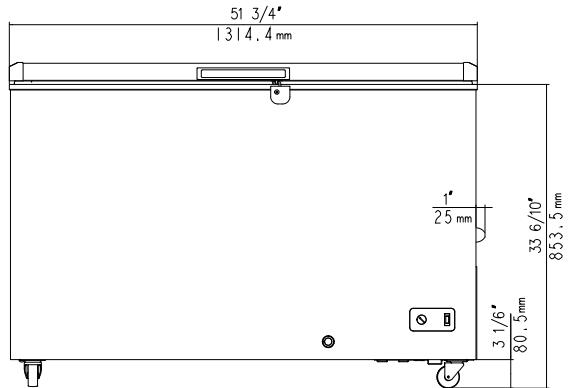


**Side**

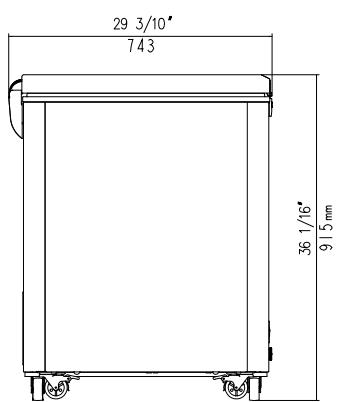

El = Electrical connection

**Top**

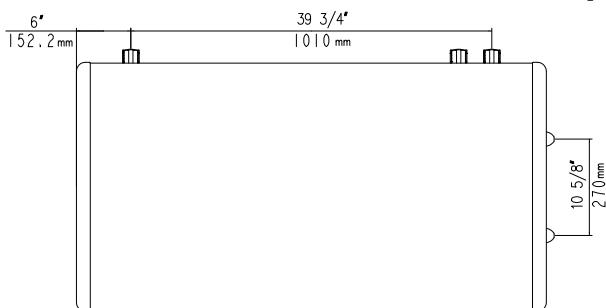

## Electric

**Supply voltage:** 115 V/1 ph/60 Hz  
**Electrical power, max:** 0.2 kW  
**Plug type:** USA NEMA 5-15P

## Capacity:

**Gross capacity:** 14.3 cu.feet

## Key Information:

**Number and type of basket (included):** 1 - Vinyl-Coated Wire  
**Warranty:** 1 / 5 years  
**Temperature control:** Mechanical  
**External dimensions, Width:** 51 3/4" (1314 mm)  
**External dimensions, Depth:** 29 1/4" (743 mm)  
**External dimensions, Height:** 36 1/32" (915 mm)  
**Internal Dimensions (depth):** 21 5/8" (550 mm)  
**Internal Dimensions (width):** 46 1/16" (1170 mm)  
**Net weight:** 150 lbs (68 kg)  
**Shipping width:** 30 1/2" (775 mm)  
**Shipping height:** 41 9/16" (1055 mm)  
**Shipping weight:** 187 lbs (85 kg)  
**Shipping volume:** 40.04 ft<sup>3</sup> (1.13 m<sup>3</sup>)

## Refrigeration Data

**Condenser type:** Static  
**Temperature display location:** Internal  
**Operating temperature min.:** -20.2 °F  
**Compressor power:** 1/5 hp  
**Operating temperature max.:** 10.4 °F  
**Defrost type:**

## Sustainability

**Current consumption:** 1.9 Amps  
**Refrigerant type:** R600a  
**GWP Index:** 3  
**Refrigerant weight:** 85 g

**Chest Freezer**  
**Solid Top Chest Freezer 52" Long**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

