





TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 0 ~ -8°F Compressor Power (HP) 3/4+3/4 Nema Config. NEMA5-20P

- Equipped with Locking Doors
- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

D83F



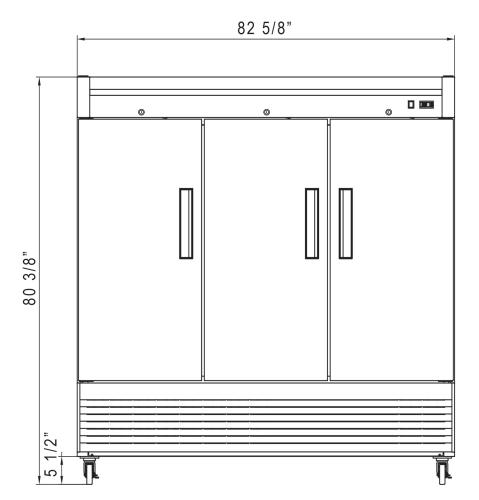

Side View

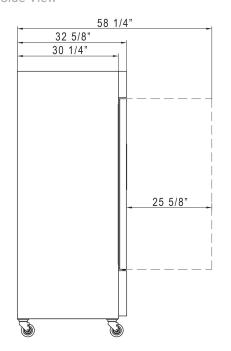

MODEL D83F

Rated Voltage 60Hz Rated Frequency **Total Input Power** 1300W **Total Current** 64.80 cu ft **Total Capacity** 4-5 **Climatic Category Protection Type** Design Pressure High Side **300 PSIG** Design Pressure Low Side **150 PSIG Insulation Blowing Gas** C-Pentane R290/4.2+4.2 oz Refrigerant

| MODEL | EXTERNAL DIMENSION | PACKAGING DIMENSION | PRODUCT NET | # OF | 40HQ |
|-------|--------------------------|--------------------------|-------------|---------|-----------------|
| | WXDXH (INCHES) | WXDXH (INCHES) | WEIGHT | SHELVES | CONTAINER CERT. |
| D83F | 82 5/8 x 32 5/8 x 80 3/8 | 84 5/8 x 34 5/8 x 82 3/8 | 595 lbs | 12 | 13 |















() 1-800-931-8628 (a) info@dukersusa.com www.DukersUSA.com